

Since 1998
The way of lifting, the way of success.
源于热爱，成于坚持。



Yingkou Qishida Machinery Equipment Co.,Ltd

Tel:+86 182 4178 3131

E-mail: anyuchen@qishida.com

Website: www.worldqishida.com/EN

EU PRODUCT LINE
欧盟地区举升机目录

2025

version:2025.10



A RELIABLE PARTNER

One Stop service

Top rated auto lift supplier

20 Years OEM manufacturing experience

200,000+ Products all over the world





Yingkou Qishida Machinery Equipment Co.,Ltd is a top-rated Chinese manufacturer with more than 20 year' s experience researching, marketing and manufacturing of car repair lifts, parking lifts and motorcycle lifts. Our company is headquartered in Yingkou city, Liaoning province in the north of China. The company was found in 1998 and the production factory is more than 30,000 square meter.

As one of the greatest industry brands in China, we have wide range of OEM customers all over the world since 2002. In addition, we have overseas distributor of Qishida brand products as well. For the technical support, we cooperate with Italian company since 2008 and many products are international-patented.

Qishida is dedicated to provide reliable automotive repair products to the customers all the time. We are looking forward to expanding more international business with you in the future!

营口骑士达机械设备有限公司坐落于东北工业基地 - 辽宁省营口市自由贸易试验区, 厂区总占地面积3万多平方米,是全国领先的设计,研发,销售一体的专业汽保设备生产企业。公司拥有国内外领先的生产技术,精良设备及完善的品控体系,历经20多年的发展已发展成为中国汽保行业的高端制造企业中的一员。

公司自1998年成立至今,根据国内外市场的不同需求先后设计和研发了柱式举升机系列、停车场举升机系列、摩托车举升系列及其他汽车保修类产品,出口全世界150多个国家及地区;骑士达品牌举升机经过多年与意大利和德国技术公司的合作,现已成为中国汽保设备行业内的优质品牌生产商!

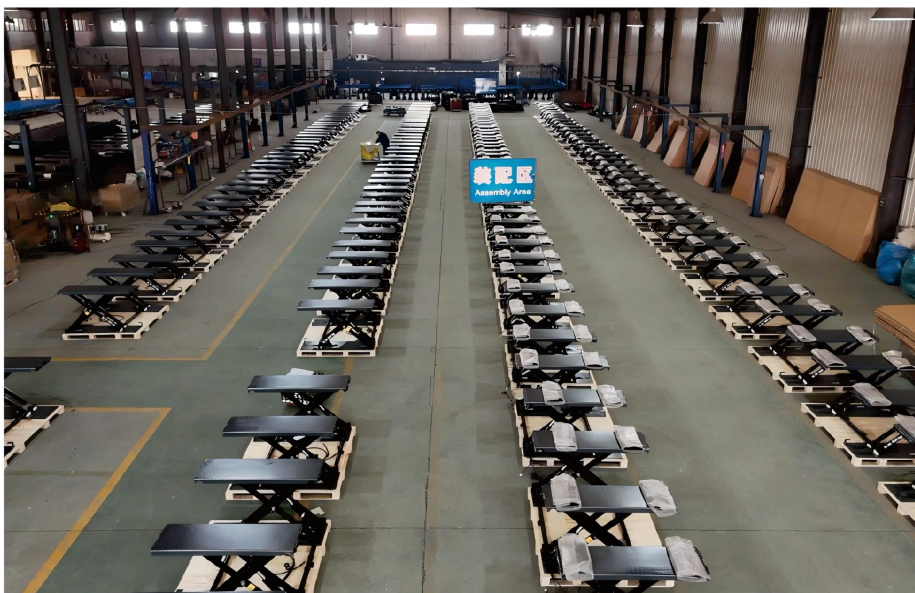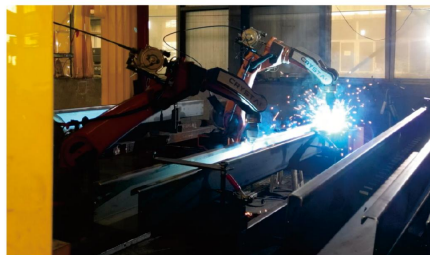

目录

CONTENTS

Entry Level-2 Post Lift 入门系列双柱举升机

01-02 QSD4.0-DB2

Professional Level-2 Post Lift 专业系列双柱举升机

03-04 QSD4000A

05-06 QSD 3800

Heavy-duty Level-2 Post Lift 重吨位系列双柱举升机

07-08 QSD5000/QSD5000B

Scissor Lift 剪式举升机

09-10 QSD X3.0E

11-12 JS3000C

13-14 DC3000

15-16 CB3000/CB3500

Motorcycle Lift 摩托车举升机

17-18 QYK-ML600

Parking Lift 停车举升机

19-20 QYK-ET30

1-Post lift 单柱举升机

21-22 QSD 2500E

4-Post lift 四柱举升机

23-24 QSD FP4500

QSD4.0-DB2




Entry Level Floor-plate 2 Post Lift
4.0 Ton Single-side Manual Lock Release
入门系列-4吨单边手动解锁双柱举升机,



Single Manual
Lock Release
单边手动解锁

4000 KG

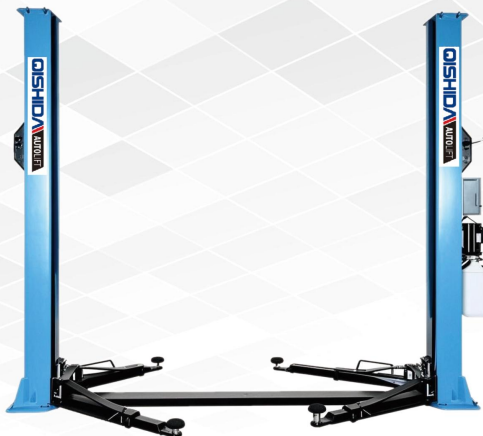

FEATURES 产品特点



Automatic arm-
locking system
托臂锁自动上锁设计



Chain protector
链条防脱装置



Synchronization
cable
钢丝绳同步



Car door protection
车门防撞垫



Safety valves against
hose breaking
安全阀确保使用安全



24v safety control box
24v 安全操作电控箱

STANDARD 标准配置



2-stage adjustable
lifting pad
双螺旋举升托盘



Steel motor
钢板电机



Column anti-dust
cover
立柱防尘罩布



Foot protection
防压脚设计



Aluminum motor
铝电机泵站




3-stage front arms
(690mm-1290mm)
3 段式前托臂
(690mm-1290mm)

OPTIONAL FEATURES 此产品可选升级方案


OPTIONAL ACCESSORIES 可选配件



Height adapters for
suvs & trucks
适用于各种车型的
增高套



Floor reinforcement
加强底座降低打孔
深度




Ground support frames
底板固定横担



Special adapter for
battery car
电动车托胎器

OVERALL DIMENSION 尺寸参数

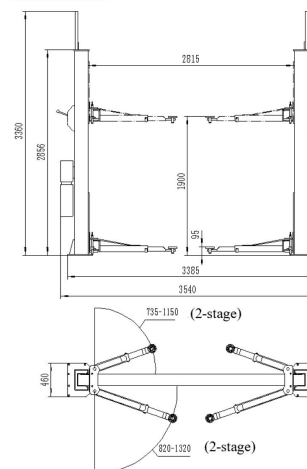

TECHNICAL DATA 技术参数

型号	Model	QSD4.0DB2
举升重量	Capacity	4000kg
举升高度 (不含托盘)	Lifting height (without pad)	1900mm
最低高度	Min. Height	95mm
总高度	Overall height	2856mm
总宽度	Overall width	3385mm
前托臂 (2 段式)	Front arm (2-stage)	735-1150mm
后托臂 (2 段式)	Rear arm (2-stage)	820-1320mm
上升时间	Lifting time	45-50s
电机功率	Power of motor	2.2kW

QSD4000A



Professional Level Floor-plate 2 Post Lift 4.0 Ton Automatic Lock Release 专业系列-4吨电动解锁双柱举升机



Electric Lock Release
电动解锁



Electromagnetic Lowering
电磁下降

4000 KG



FEATURES 产品特点



Automatic arm-locking system
托臂锁自动上锁设计



Chain protector
链条防脱装置



Synchronization cable
钢丝绳同步



Car door protection
车门防撞垫



24v safety control box
24v 安全操作电控箱



Safety valves against hose breaking
安全阀确保使用安全

STANDARD 标准配置



2-stage adjustable lifting pad
双螺旋举升托盘



Aluminum motor
标配铝电机泵站



Column anti-dust cover
立柱防尘遮布



Optional 3-stage front arms
(690mm-1290mm)
可选配 3 段式前托臂
(690mm-1290mm)

OPTIONAL ACCESSORIES 可选配件



Height adapters for suvs & trucks
适用于各种车型的增高套



Anti-dust column cap
立柱防尘装饰帽



Floor reinforcement
加强底座降低打孔深度



Ground support frames
底板固定横担





Special adapter for battery car
电动车托胎器



Fast adjustable pad
快速托盘

OVERALL DIMENSION 尺寸参数

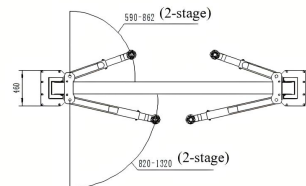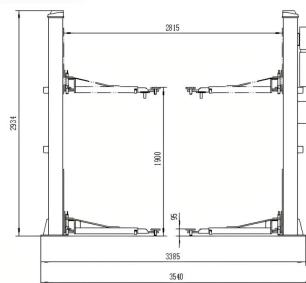

TECHNICAL DATA 技术参数

型号	Model	QSD4000A
举升重量	Capacity	4000kg
举升高度 (不含托盘)	Lifting height (without pad)	1900mm
最低高度	Min. Height	95mm
总高度	Overall height	2856mm
总宽度	Overall width	3385mm
前托臂 (2段式)	Front arm (2-stage)	590-862mm
后托臂 (2段式)	Rear arm (2-stage)	820-1320mm
上升时间	Lifting time	45-50s
电机功率	Power of motor	2.2kW

QSD3800



Professional Level Clear-floor 2 Post Lift 4.0 Ton Automatic Lock Release 专业系列-4吨电动解锁龙门举升机,



Electric Lock Release
电动解锁



Electromagnetic Lowering
电磁下降

4000 KG



FEATURES 产品特点



Automatic arm-locking system
托臂锁自动上锁设计



Chain protector
链条防脱装置



Synchronization cable
钢丝绳同步



Car door protection
车门防撞垫



24v safety control box
24v 安全操作电控箱



Safety valves against hose breaking
安全阀确保使用安全

STANDARD 标准配置



2-stage adjustable lifting pad
双螺旋举升托盘



Aluminum motor
标配铝电机泵站




Column anti-dust cover
立柱防尘遮布


OPTIONAL ACCESSORIES 可选配件



Height adapters for suvs & trucks
适用于各种车型的增高套



Floor reinforcement
加强底座降低打孔深度



Ground support frames
底板固定横担




Special adapter for battery car
电动车托胎器



Fast adjustable pad
快速托盘

OVERALL DIMENSION 尺寸参数

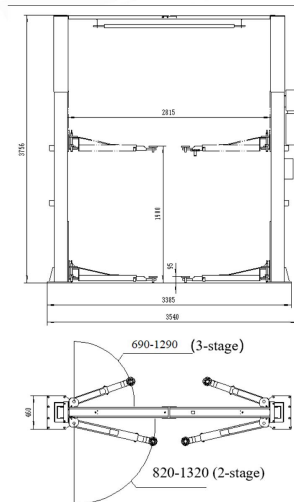

TECHNICAL DATA 技术参数

型号	Model	QSD3800
举升重量	Capacity	4000kg
举升高度 (不含托盘)	Lifting height (without pad)	1900mm
最低高度	Min. Height	95mm
总高度	Overall height	3756mm/4000mm/4500mm
总宽度	Overall width	3385mm
前托臂 (3段式)	Front arm (3-stage)	690-1290mm
后托臂 (2段式)	Rear arm (2-stage)	820-1320mm
上升时间	Lifting time	45-50s
电机功率	Power of motor	2.2kW

QSD5000 QSD5000B



Heavy-duty Level 2-Post Lifts
5.0 Ton Automatic Lock Release
重吨位系列 - 5吨电动解锁双柱/龙门举升机,



Electric Lock Release
电动解锁



Electromagnetic Lowering
电磁下降

5000 KG



FEATURES 产品特点



Automatic arm-locking system
托臂锁自动上锁设计



Car door protection
车门防撞垫



Column anti-dust cover
立柱防尘遮布



24v safety control box
24v 安全操作电控箱



Safety valves against hose breaking
安全阀确保使用安全

STANDARD 标准配置



2-stage adjustable lifting pad
双螺旋举升托盘



Aluminum motor
标配铝电机泵站




85mm height adapters (4 pcs)
4个85mm 增高套

OPTIONAL ACCESSORIES 可选配件



Height adapters for vans & trucks (100/150/200mm)
100/150/200mm 增高套



Floor reinforcement
加强底座降低打孔深度





Special adapter for battery car
电动车托胎器





Fast adjustable pad
快速托盘

OVERALL DIMENSION 尺寸参数

QSD5000

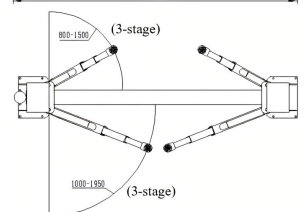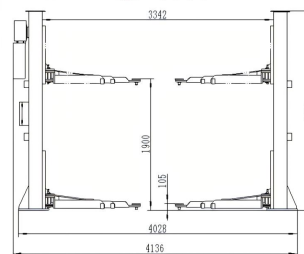

QSD5000B

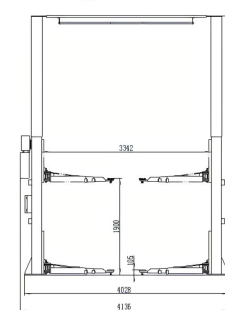

TECHNICAL DATA 技术参数

型号	Model	QSD5000	QSD5000B
举升重量	Capacity	5000kg	5000kg
举升高度 (不含托盘)	Lifting height (without pad)	1900mm	1900mm
最低高度	Min. Height	105mm	105mm
总高度	Overall height	2880mm	5100mm
总宽度	Overall width	4028mm	4028mm
前托臂 (3 段式)	Front arm(3-stage)	800-1500mm	800-1500mm
后托臂 (3 段式)	Rear arm(3-stage)	1000-1950mm	1000-1950mm
上升时间	Lifting time	45-50s	45-50s
电机功率	Power of motor	2.2kW	2.2kW

QSD X3.0E



Mobile Scissor Lift With Automatic Lock Release 移动式电动解锁中位剪


3000 KG



FEATURES 产品特点

- ✓ 3000KG (6,600lbs) lifting capacity
- ✓ Perfect lift for painting jobs and bodywork, brakes and tire service
- ✓ UP ,Down and LOCK by buttons, automatic lock release
- ✓ Automatic arm locking system, which makes sure the lifting arms can not move when the car is lifted
- ✓ Portable motor cart serves as tow dolly, making it portable and able to operate on concrete indoors or outdoors
- ✓ Dual cylinder structure,ensure stable raising and lowering
- ✓ Multiple locking positions accommodates higher profile vehicles and provides maximum headroom to work underneath vehicles
- ✓ Powder coated finish provides long-lasting durable use
- ✓ Each lift passes the 115% rated capacity (3,450kg) dynamic load test and 150% rated capacity (4,500kg) static load test,safe and reliable.
- ✓ Steel motor is standard, aluminum motor is optional.

OVERALL DIMENSION 尺寸参数

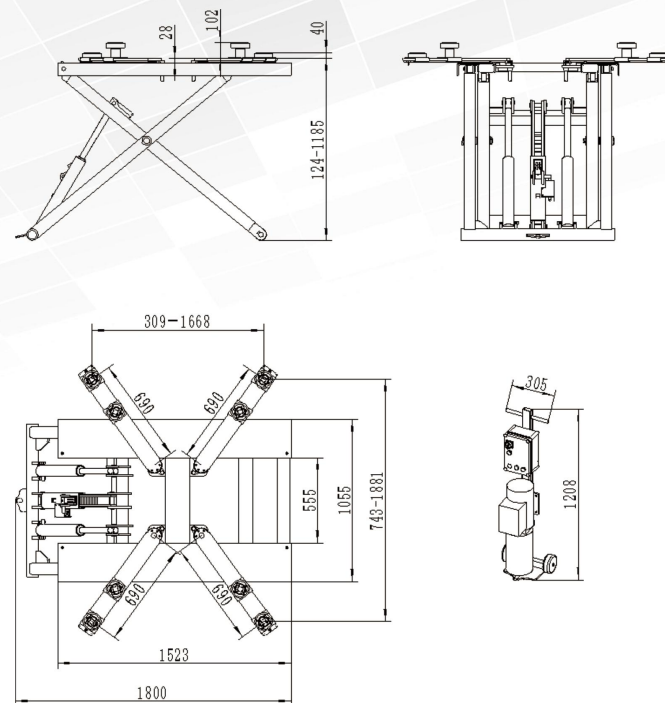

TECHNICAL DATA 技术参数

型号	Model	QSD X3.0E
举升重量	Capacity	3000kg
举升高度	Lifting height	1225mm
最低高度	Min.height	124mm
上升时间	Lifting time	30-35s
电机功率	Motor power	2.2kW

JS3000C



Mobile Scissor Lift With Automatic Lock Release 移动式电动解锁中位剪



3000 KG



OPTIONAL ACCESSORIES 可选配件



Lifting pads
60mm/80mm/100mm
举升胶垫
60mm/80mm/100mm





Additional drive-on
ramps
加长上车跑板



SUV adapter kit
SUV 加高支架

OVERALL DIMENSION 尺寸参数

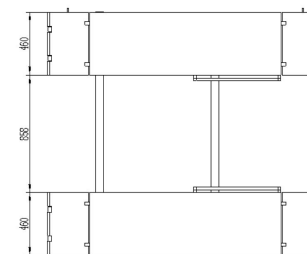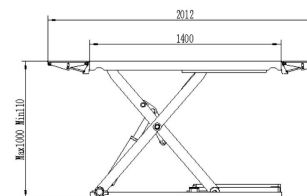


FEATURES 产品特点



Automatic lock & release
全自动解锁 & 上锁




Stable launch & land
design
加强助力器设计



Extendible ramps
加长延伸板



CE-Stop (foot protection)
下限位开关 (防压脚设
计)



Mobile design
可移动小剪设计

STANDARD 标准配置



35mm lifting pads (4 pcs)
35mm 举升胶垫 (4 个)

OPTIONAL FEATURES 此产品可选升级方案



Mobile kit
移动组件

TECHNICAL DATA 技术参数

型号	Model	JS3000C
举升重量	Capacity	3000kg
举升高度	Lifting height	1000mm
最低高度	Min. Height	110mm
平台长度	Platform length	1400-2012mm
总宽度	Overall width	1778mm
上升时间	Lifting time	30-35s
电机功率	Power of motor	2.2kW

DC3000



In-floor Installation Scissor Lift 地藏式剪式升降机

3000 KG



Pneumatic Lock Release
气动解锁



Electromagnetic Lowering
电磁下降




OPTIONAL ACCESSORIES 可选配件



SUV adapter kit
SUV 加高支架

OVERALL DIMENSION 尺寸参数

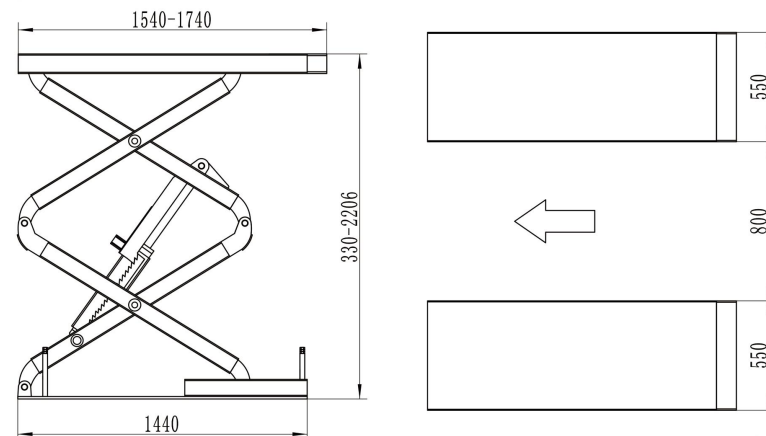


FEATURES 产品特点



Automatic lock& release
全自动解锁 & 上锁



Height limit switch
上限位开关



In-floor design
地藏式安装



Automatic air bleeding by button
一键调平功能



Sliding extension on single-side of the platform
单侧可抽拉式平台

STANDARD 标准配置



35mm lifting pads (4 pcs)
35mm 举升胶垫 (4 个)

TECHNICAL DATA 技术参数

型号	Model	DC3000
举升重量	Capacity	3000kg
举升高度	Lifting height	2206mm
最低高度	Min. Height	330mm
平台长度	Platform length	1540mm-1740mm
上升时间	Lifting time	45-50s
电机功率	Power of motor	2.2kW

CB3000 CB3500



On-floor Double Scissor Lift 超薄剪式升降机

3000 KG

3500 KG




Double master / slave system,
therefore no compressed air and
no safety rack necessary!
双油路设计完美保障液压安全，
无需气源和安全锁！

OPTIONAL ACCESSORIES 可选配件 ▼



SUV adapter kit
SUV 加高支架

OVERALL DIMENSION 尺寸参数

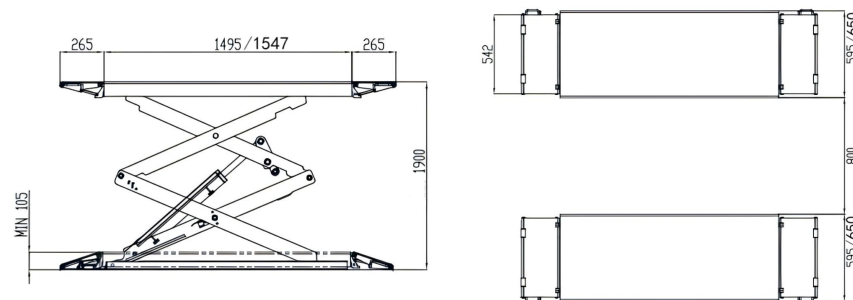

FEATURES 产品特点



Ultra-flat design
超薄省空间设计



Automatic air bleeding by
button
一键调平功能



Dual double
cylinders design
4 油缸同步系统



Electronic synchronization
through photo sensor and
reflector
电子装置防止车辆侧翻

STANDARD 标准配置 ▼



Rubber pads (4 pcs)
举升胶垫 4 个

TECHNICAL DATA 技术参数

型号	Model	CB3000	CB3500
举升重量	Capacity	3000kg	3500kg
举升高度	Lifting height	1900mm	1900mm
最低高度	Min. Height	105mm	105mm
平台长度	Platform length	1495mm-2025mm	1547mm-2077mm
总宽度	Overall width	1990mm	2100mm
平台宽度	Platform width	595mm	650mm
电机功率	Power of motor	3.0kW	3.0kW

QYK-ML600



Electro-hydraulic Motorcycle Lift 电动液压摩托车举升机

QYK-ML600



QYK-ML600 + ATV extensions kit

600 KG



FEATURES 产品特点



Laser-cutting safety lock
激光切割安全锁



Front-wheel clamp
手动可调节前轮夹具



Rear opening for dismantling wheel
便于后轮拆卸



Safety valves against hose breaking
安全阀确保使用安全



Aluminum motor
标配铝电机


OPTIONAL ACCESSORIES 可选配件




ATV extensions kit
加宽延伸板用于四轮摩托

OVERALL DIMENSION 尺寸参数

QYK-ML600

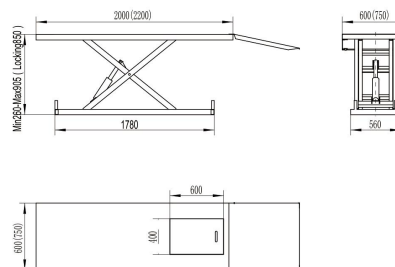

QYK-ML600 + ATV extensions kit

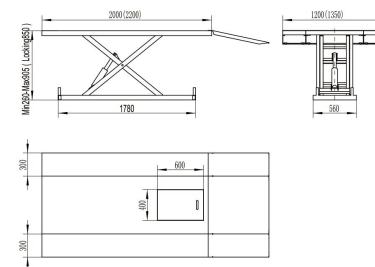

TECHNICAL DATA 技术参数

型号	Model	QYK-ML600	QYK-ML600 + ATV extensions kit
举升重量	Capacity	600kg	600kg
最大举升高度	Max. Lifting height	850mm	850mm
最低高度	Min. Height	260mm	260mm
平台长度	Platform length	2000mm/2200mm	2000mm/2200mm
总宽度	Overall width	600mm/750mm	1200mm/1350mm
电机功率	Power of motor	0.55kW	0.55kW

STANDARD 标准配置



Standard controller for lifting and lowering
标配款控制手柄




Straps and hooks
摩托车绑带和挂钩

OPTIONAL FEATURES 此产品可选升级方案



Optional mobile control unit for lifting and lowering
选配款可移动式控制箱



Magnetic controller
磁吸手柄

QYK-ET30




2 Post Parking Lift With Shared Columns 双柱共享停车场

3000 KG



Electric Lock
Release
电动解锁

Electromagnetic
Lowering
电磁下降

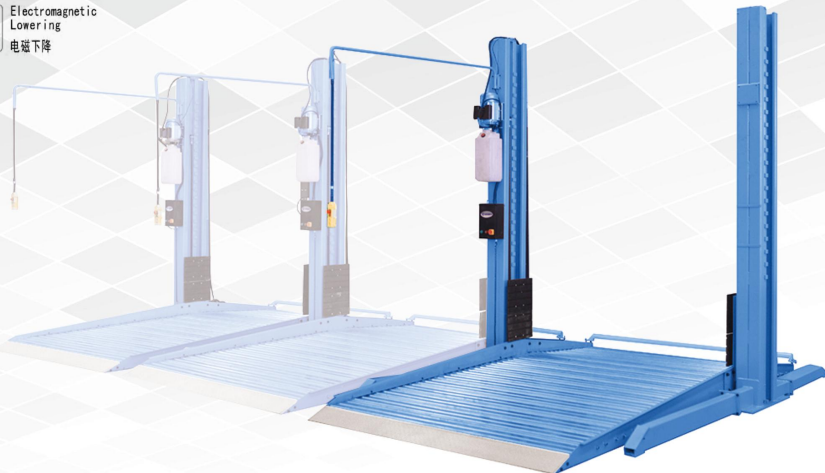

FEATURES 产品特点



Chain protector design
链条防脱防夹手功能



Height limit switch
上限位开关



Safety valves against hose
breaking
安全阀确保使用安全



Parking space doubler
上下双层停车设计

STANDARD 标准配置





24v safety control
24v 安全电压操作



Aluminum motor
铝电机散热性能好

OVERALL DIMENSION 尺寸参数

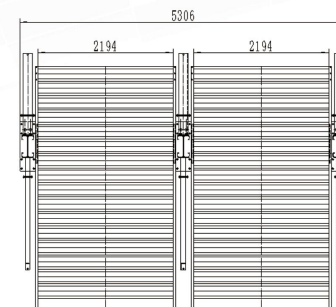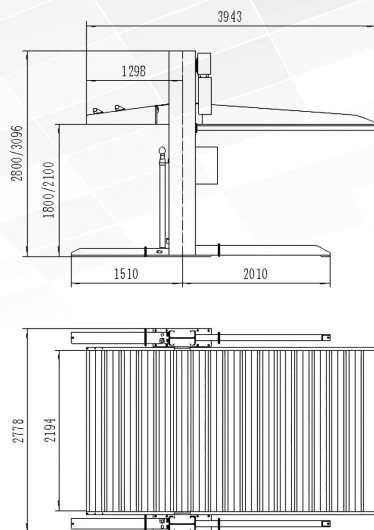

TECHNICAL DATA 技术参数

型号	Model	QYK-ET30
举升重量	Capacity	3000kg
举升高度	Lifting height	1800mm/2100mm
平台长度	Platform length	3943mm
总高度	Overall height	2800mm/3096mm
上升时间	Lifting time	45-50s
电机功率	Power of motor	2.2kW


QSD 2500E 2.5 Ton Automatic Mobile Single-post Lift 2.5吨电动解锁移动单柱举升机



FEATURES 产品特点

- ✓ 2,500kg lifting capacity, mobile single post lift
- ✓ Fully automatic lock release, UP and DOWN operation via control box
- ✓ Double spindle screw-up lifting pads, easy to locate support points
- ✓ Fully adjustable swing lifting arms
- ✓ Automatic arm locking system
- ✓ Heavy-duty structural column
- ✓ Aluminum motor avoids overheated and ensures long service life
- ✓ Pallet jack style hydraulics to raise lift onto wheels
- ✓ 4 pcs 85mm truck and SUV height adapters included
- ✓ Powder coat paint finish
- ✓ Approved in accordance with European CE standard EN 1493

OVERALL DIMENSION 尺寸参数

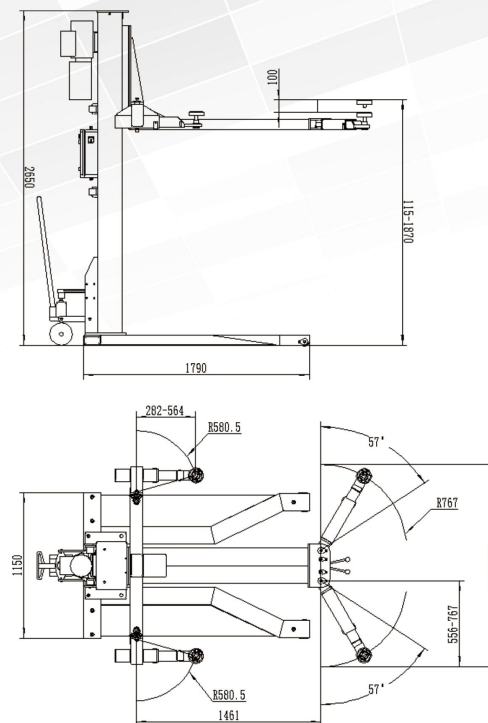

TECHNICAL DATA 技术参数

型号	Model	QSD 2500E
举升重量	Lifting capacity	2500kg
举升高度	Max.lifting height	1870mm
最低高度	Min.height	115mm
上升时间	Lifting time	60s
电机功率	Motor Power	2.2kW

QSD FP4500



4.5 Ton Alignment Four-post Lift 4.5吨气动解锁四轮定位四柱举升机




Pneumatic Lock
Release
气动解锁



Electromagnetic
Lowering
电磁下降


4500 KG

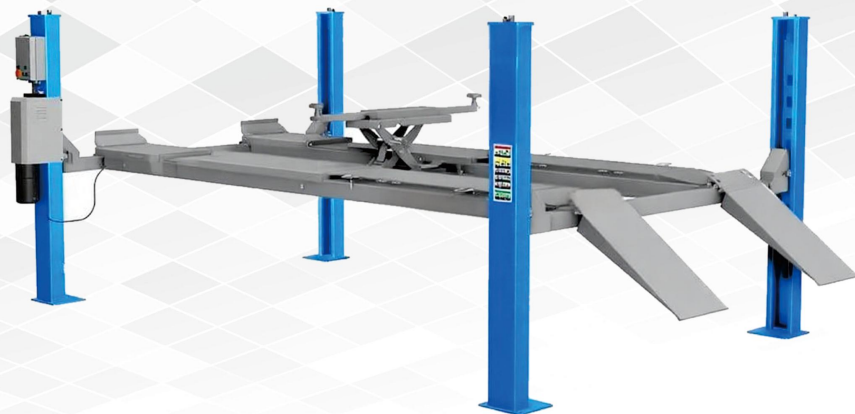

FEATURES 产品特点

- ✓ 4500kg lifting capacity, suitable for cars, vans, and minibuses
- ✓ 3000Kg jacking beam included
- ✓ Air operated unlocking system with 24v safety control box
- ✓ Featured with rear slip plates and turning plate sections for wheel alignment
- ✓ 4720mm extra-long platform
- ✓ Hydraulic failure safety devices
- ✓ Vehicle rollback protection
- ✓ Automatic steel cable failure protection
- ✓ Foot protection
- ✓ Lift has passed the 115% rated capacity (5,175kg) dynamic and 150% rated capacity (6,750kg) static loading tests
- ✓ Aluminum motor is standard, motor cover is optional

OVERALL DIMENSION 尺寸参数

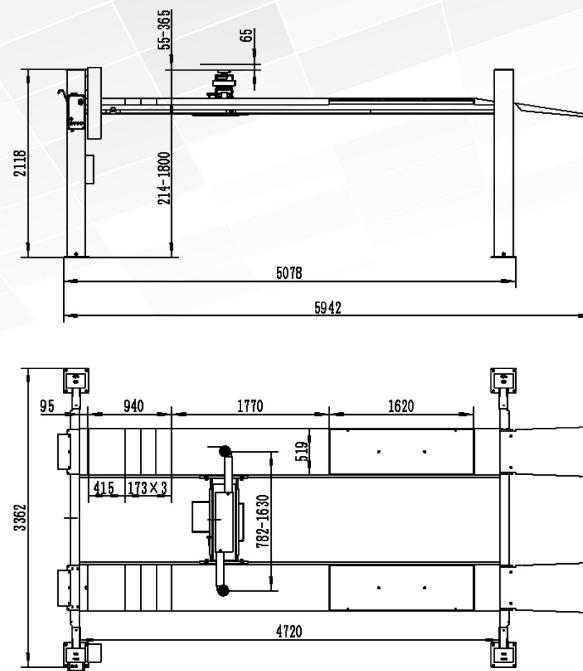

TECHNICAL DATA 技术参数

型号	Model	QSD FP4500
举升重量	Lifting capacity	4500kg
举升高度	Max.lifting height	1800mm+365mm
最低高度	Min.height	214mm
平台长度	Platform length	4720mm
平台宽度	Platform width	519mm
电机功率	Motor power	2.2kW